

PCT

(30) Priority Data:

WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

WO 99/19717 (11) International Publication Number: (51) International Patent Classification 6: A1 22 April 1999 (22.04.99) (43) International Publication Date: G01N 25/22

US

PCT/US98/21869 (21) International Application Number:

15 October 1998 (15.10.98) (22) International Filing Date:

15 October 1997 (15.10.97) 08/950,403 (63) Related by Continuation (CON) or Continuation-in-Part

(CIP) to Earlier Application 08/950,403 (CIP) US 15 October 1997 (15.10.97) Filed on

(71) Applicant (for all designated States except US): ACLARA BIOSCIENCES, INC. [US/US]; 3906 Trust Way, Hayward, CA 94545 (US).

(72) Inventors; and (75) Inventors/Applicants (for US only): BJORNSON, Torleif, Ove [SE/US]; 7030 Daniel Court, Gilroy, CA 9502 (US). SHEA,

Center, San Francisco, CA 94111-4187 (US).

Laurence, R. [US/US]; 881 Cherry Creek Circle, San Jose, CA 95126 (US). (74) Agents: TRECARTIN, Richard, F. et al.; Flehr, Hohbach,


Test, Albritton & Herbert LLP, Suite 3400, 4 Embarcadero

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published

With international search report.

(54) Title: LAMINATE MICROSTRUCTURE DEVICE AND METHOD FOR MAKING SAME

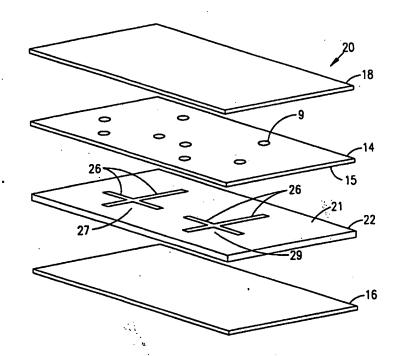

(57) Abstract

A continuous form microstructure array device (20) is constructed as a flexible elongate film laminate containing microstructure arrays (26) arranged serially along the laminate. The laminate can be continuously drawn from a roll, passed through a processing and analysis device and rerolled or stacked for storage.